




非凡电源
REMARKABLE ENERGY

SPACEFLIGHT POWER SUPPLY CO., LTD. EFB T115 12V80Ah (6-QTE-80)

EFB batteries, specially designed for cars equipped with advanced start-stop systems. The range includes DIN style maintenance free batteries for popular European vehicles, plus low maintenance flooded batteries for Asian manufactured vehicles. EFB battery uses a new type of alloy, new lead paste formula, and new separator, which make service life, water loss, low temperature starting and other aspects of EFB battery have been greatly improved. It has long cycle life, high starting power in low temperature, suitable for frequent starting.



Dimensions

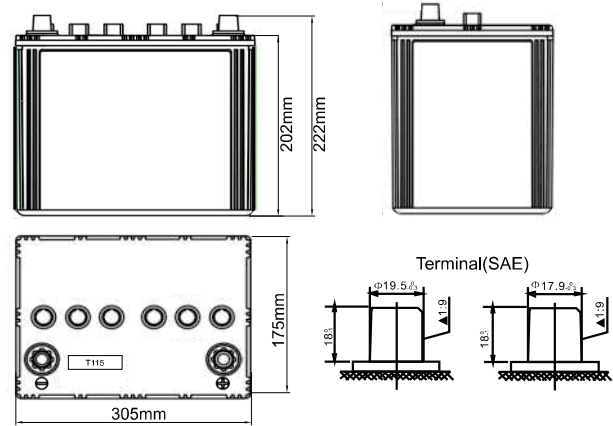

General Features

- Ultra-low internal resistance separator to reduce battery self-discharge
- Strongest starting burst, low temperature, or low state of charge can still start the engine
- Durable grid design, less water loss, prolonging the service life in a high-temperature environment
- Using high conductive lead alloy casting and welding, through-wall welding technology, high current starting performance is good
- 2x higher cycling endurance

Compliant Standards

- EN 50342
- GB/T5008.1-2013
- JB/T 12666
- ISO45001, ISO9001 and ISO14001 certified production facilities

Specifications

| | |
|------------------------------|-------------------|
| Nominal Voltage | 12V |
| 20Hr Capacity @25°C(77°F) | 80Ah |
| Reserve Capacity (25A) | 140min |
| CCA(EN) | 780A |
| Weight | 21.3kg |
| Dimension | 305 * 175 * 222mm |
| Operating Temperature | -30°C ~ 70°C |
| Acceptable Charging Current | 20A |
| Charging Voltage @25°C(77°F) | 14.4V ~ 15.0V |
| Self-Discharge @25°C(77°F) | ≤3% per month |
| Case Material | Reinforced PP |
| Terminal | SAE |

Factory Address: Fukang industrial park, LongNan, GanZhou JianXi.

Office add: RM201, Building D, Penglitai Industrial Park, No. 4, Longping West Road, Longgang District, Shenzhen.

TEL: +86-755-28288189

sales@sfbattery.com

www.sfbattery.com